



*Less Waste
Maximum
Efficiency*



Optiflo
Optimized Flow Control

What Is Optiflo?

>>>>

Simply stated, Optiflo is an advanced technology designed to optimize your compressed air usage. Every air system, no matter how good, has leaks. When reducing an air system's working pressure, the volume of air lost through leakage is dramatically reduced. The reduction in lost air volume directly relates to power savings on the running of your air compressor and increases your bottom line.

Even tools benefit. Air tools are designed to work at specific pressures, so ensuring the correct pressure to your tools will optimize their performance, increase life and reduce maintenance, all in addition to preventing wasted energy.

Installing an Optiflo in your system will not only provide considerable power savings but also increase the life expectancy of your compressor and radically reduce maintenance costs. Minimizing lost air volume will reduce the amount of time your compressor has to run. The less it runs the longer its life expectancy and the less maintenance it will require.

- > Significantly Reduce Energy
- > Improve Productivity
- > Enhance Compressor Life
- > Minimize Maintenance Costs

Optiflo 10/7 Equation

>>>>

Every 10 psi in plant pressure reduction will gain you 7% energy savings.

Installing an Optiflo in conjunction with suitable storage, allows compressed air to be stored at a high pressure while delivering consistent, low-pressure air to the balance of the system.


Typical Compressor Usage

>>>>

15 HP (11kw) compressor running 3000 hours per year at 10¢ per KW = \$3,300 annual power cost.

Savings with Optiflo

>>>>

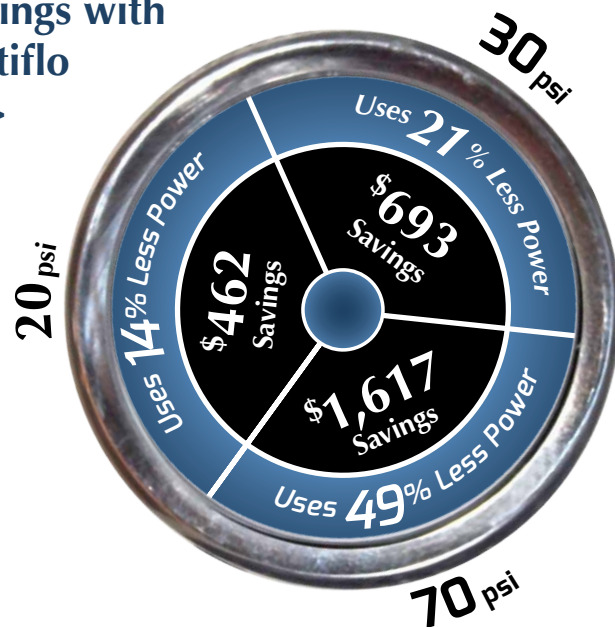


Optiflo Features:

>>>


- > **Nitrile seals** for high level of chemical resistance.
- > **Balanced valve design** is the most robust available and provides immediate response to changes in air demands.
- > **NPT threads** to connect easily to new or existing pipe systems.
- > **Glycol filled, stainless steel dual gauge design** for easy reference of pressure at inlet and outlet.
- > **Unit can be fixed to wall or secured directly** to the piping system.
- > **Powder coated steel chassis** for enhanced durability.
- > **Tamper proof dial** centrally located for quick adjustment and easy calibration.
- > Unit can be ordered for **left to right or right to left flow** to meet your install needs.
- > Compatible with both **rotary and reciprocating** compressor technology.



Typical Optiflo System >>>

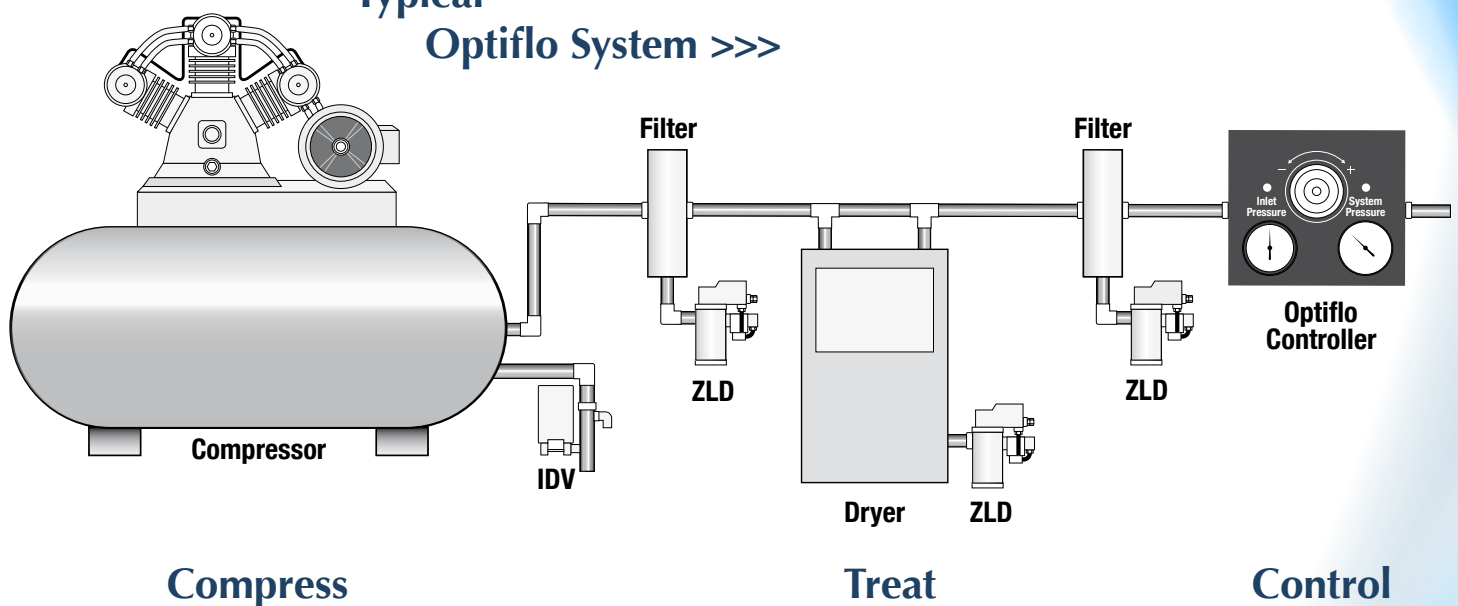

Optiflo Technical Data

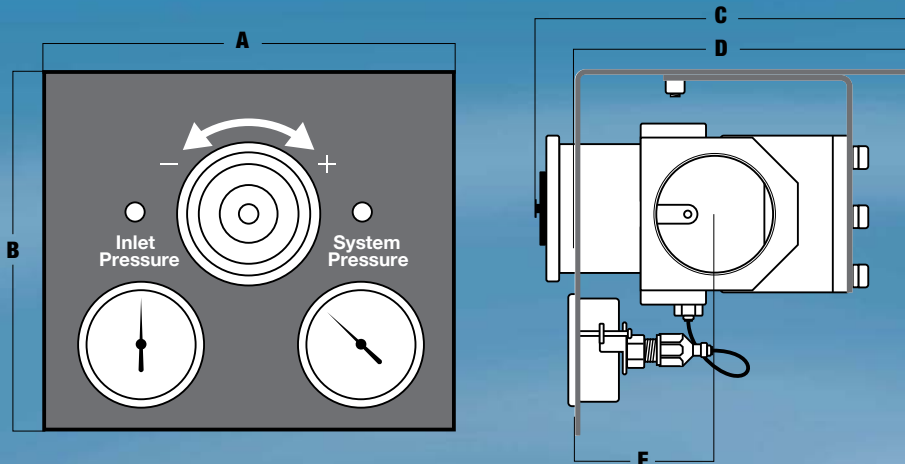

Optiflo color choices to match your system



Inlet Size	Max Flow	A	B	C	D	E	Weight
1/2"	75 scfm	8.11"	7.28"	8.57"	7.36"	1.89"	8.4 lbs
1"	200 scfm					2.21"	10.45 lbs
2"	1000 scfm					2.78"	14.65 lbs

Inlet Size	Frame Color	Left to Right Flow Part Number	Right to Left Flow Part Number	Max Flow	Max Inlet Pressure	Control Range	Temp Range	Sensitivity	Repeatability
1/2"	Green	OP-75-GRN-LR	OP-75-GRN-RL	75 scfm	300 psig	0-160 psig	-4° F to +176° F	0.2% of full span	± 0.5% of full span
	Blue	OP-75-BLU-LR	OP-75-BLU-RL						
	Black	OP-75-BLK-LR	OP-75-BLK-RL						
1"	Green	OP-200-GRN-LR	OP-200-GRN-RL	200 scfm					
	Blue	OP-200-BLU-LR	OP-200-BLU-RL						
	Black	OP-200-BLK-LR	OP-200-BLK-RL						
2"	Green	OP-1000-GRN-LR	OP-1000-GRN-RL	1000 scfm					
	Blue	OP-1000-BLU-LR	OP-1000-BLU-RL						
	Black	OP-1000-BLK-LR	OP-1000-BLK-RL						

Applied System Technologies
9800 West Kinney Avenue, Suite 135
Huntersville, NC 28078

P): 704-947-6966
E): info@appliedsystemtech.com

Nothing contained on these pages is intended to extend any warranty or representation, expressed or implied, regarding the product described herein. Any such warranties or other terms and conditions of sale of products shall be in accordance with Applied System Technologies standard terms and conditions for such products, which are available upon request. Product improvement is a continuing goal at Applied System Technologies. Designs and specifications are subject to change without notice or obligation.