



| APP'L | DATE     | LVL | REVISION |
|-------|----------|-----|----------|
|       | 06/18/09 | A   | NO1266   |

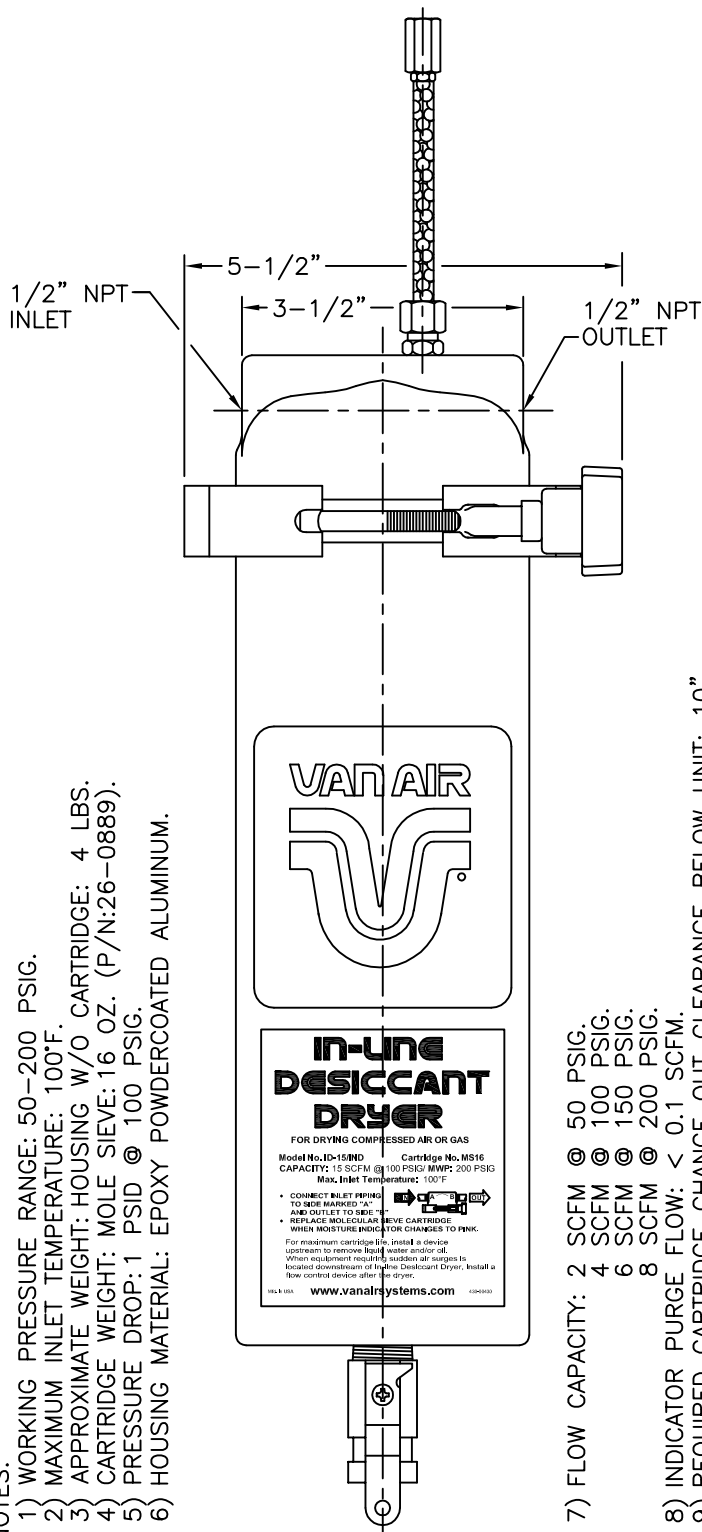

- 7) FLOW CAPACITY: 2 SCFM @ 50 PSIG.  
 4 SCFM @ 100 PSIG.  
 6 SCFM @ 150 PSIG.  
 8 SCFM @ 200 PSIG.
- 8) INDICATOR PURGE FLOW: < 0.1 SCFM.
- 9) REQUIRED CARTRIDGE CHANGE OUT CLEARANCE BELOW UNIT: 10"

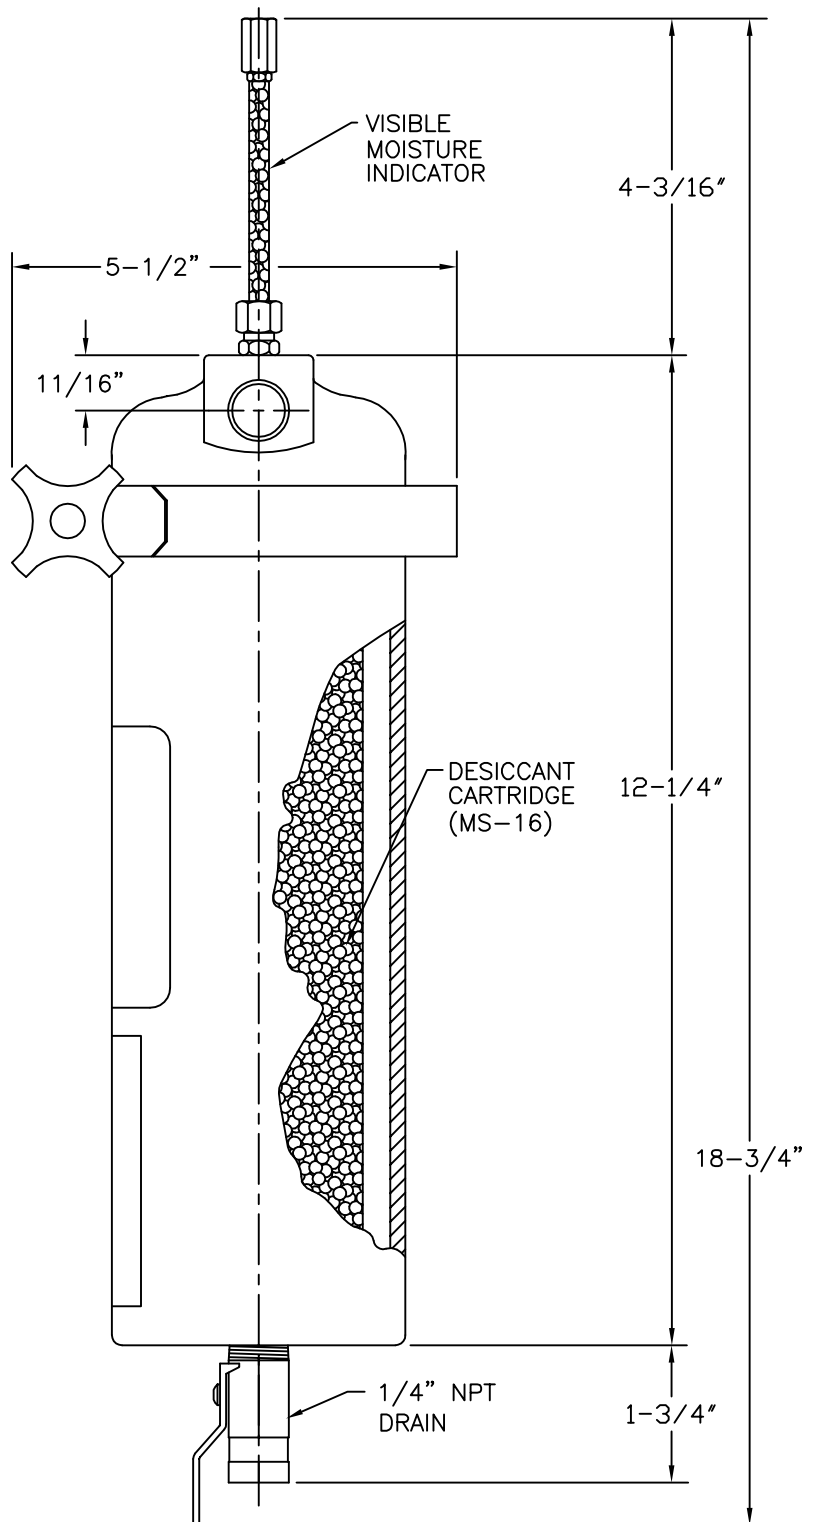

P/N: 38-0124

This drawing is the property of

**VAN AIR SYSTEMS INC**

and is subject to return upon request. It shall not be copied or duplicated in any manner and shall not be submitted to outside parties for examination without the consent of Van Air Systems Inc. It shall be used for reference to work under contract or proposals submitted by Van Air Systems Inc. only.

## IN-LINE DESICCANT DRYER ID15/IND

|              |               |          |     |
|--------------|---------------|----------|-----|
| DRWN BY: WLN | DATE: 11/2/93 | DRWG No. | REV |
| CHECKED: RAF | SCALE: NONE   | SD-80020 | A   |
| APPL: RAF    |               |          |     |

**VAN AIR SYSTEMS INC**

Lake City, PA 16423 (814)774-2631 Fax: 814/774-3482 Telex: 91-4548